



The Brighter Choice



COLUMBUS

IP65 Non-corrosive



Industrial Lighting Made Simple

Light up large areas of open space with COLUMBUS.

The COLUMBUS light fitting offers exceptional efficiency up to 162 l.m/c.W and delivering up to 9,566 lumens with a robust and practical design. Its sleek, durable construction makes it an ideal choice for illuminating large indoor spaces and outdoor under-canopy areas.

Ideal for:



FACTORIES



GARAGES



WORKSHOP



FOOD PREPARATION AREAS

COLUMBUS

BESA fixing points

Pre-moulded drill points at 600mm centres for speed of installation & accuracy.

Power selectable

The multi-wattage driver allows the lumen output to be changed on-site, providing complete flexibility.

Quality and reassurance

Built to last with stainless steel fixings, IP65 and IK10 drop-tested durability, and an ENEC approved flicker-free driver. Backed by a 5-year warranty - install and forget.



Emergency options

Manual test and self-test 3 hour maintained emergency options with LiFePO₄ batteries. Plug and play conversion packs are also available.

Microwave sensor

Lower energy costs by activating lighting only when needed with the optional plug and play microwave sensor.

Extended surface mount bracket rail



A spacious 180mm mounting area provides greater flexibility for easier retrofitting and installation.

Tool-free terminal block

Tool-free push fit terminals for easy and hassle free installation. Mounted on base for easy routing of mains power supply cables.

Product codes

ORDER CODE	DIMENSIONS		POWER (W)	LUMENS (lm)	EFFICACY (l.lm/c.W)	CRI	CCT (K)
	LENGTH (mm)	WIDTH (mm)					
NCB/4/15-26/840	1200	89	15 / 19 / 22 / 26	2090 / 2545 / 2946 / 3567	139 / 136 / 132 / 135	>80	4000
NCB/4/15-26/M3L/840	1200	89	15 / 19 / 22 / 26	2090 / 2545 / 2946 / 3567	139 / 136 / 132 / 135	>80	4000
NCB/4/22-40/840	1200	89	22 / 28 / 34 / 40	3429 / 4204 / 4885 / 5557	154 / 147 / 145 / 141	>80	4000
NCB/4/22-40/M3L/840	1200	89	22 / 28 / 34 / 40	3429 / 4204 / 4885 / 5557	154 / 147 / 145 / 141	>80	4000
NCB/5/20-36/840	1500	89	20 / 25 / 30 / 34	2739 / 3329 / 3859 / 4755	139 / 133 / 128 / 139	>80	4000
NCB/5/20-36/M3L/840	1500	89	20 / 25 / 30 / 34	2739 / 3329 / 3859 / 4755	139 / 133 / 128 / 139	>80	4000
NCB/5/30-52/840	1500	89	30 / 38 / 45 / 52	4397 / 5260 / 6198 / 7945	143 / 140 / 137 / 149	>80	4000
NCB/5/30-52/M3L/840	1500	89	30 / 38 / 45 / 52	4397 / 5260 / 6198 / 7945	143 / 140 / 137 / 149	>80	4000
NCB/6/27-47/840	1800	89	27 / 33 / 40 / 47	3695 / 4398 / 5154 / 6281	137 / 133 / 129 / 138	>80	4000
NCB/6/27-47/M3L/840	1800	89	27 / 33 / 40 / 47	3695 / 4398 / 5154 / 6281	137 / 133 / 129 / 138	>80	4000
NCB/6/25-71/840	1800	89	25 / 31 / 38 / 44 / 51 / 57 / 64 / 71	4035 / 4705 / 5679 / 6502 / 7394 / 8070 / 8844 / 9566	162 / 153 / 151 / 148 / 145 / 142 / 138 / 135	>80	4000
NCB/6/25-71/M3L/840	1800	89	25 / 31 / 38 / 44 / 51 / 57 / 64 / 71	4035 / 4705 / 5679 / 6502 / 7394 / 8070 / 8844 / 9566	162 / 153 / 151 / 148 / 145 / 142 / 138 / 135	>80	4000

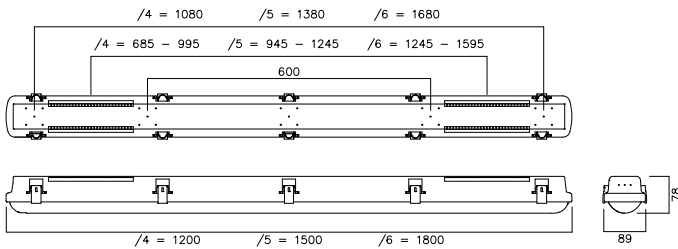

Emergency conversion packs

ORDER CODE	DESCRIPTION	POWER
N/LINEAR/M3L/CONV-PACK	LiFe Linear M3L Emergency Conversion Pack	2
N/LINEAR/STM3L/CONV-PACK	LiFe Linear STM3L Emergency Conversion Pack	2

MW Sensor

ORDER CODE	DESCRIPTION
N/MW/MC0985-991	Plug & Play MW Sensor for NGN PRO & NCB



SCAN QR CODE TO DOWNLOAD CATALOGUE PAGE



NVC LIGHTING LTD

NVC Park 201, Hollymoor Way, Rubery, Birmingham, B31 5HE UK

+44 (0)121 457 6340 | sales@nvcuk.com | www.nvcuk.com

